


Self-Adjusting Rotators

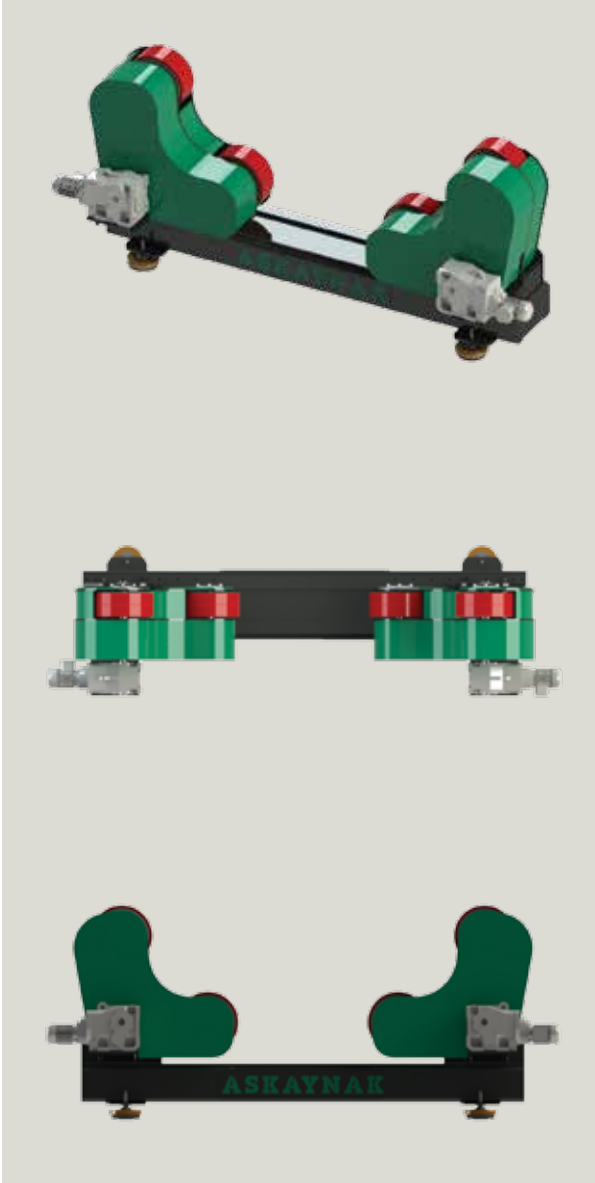

Askaynak self-adjusting rotator systems are suitable for welding materials having different diameters. These systems automatically detect materials having different diameters and enable welding parts to be rotated without extra settings.

Rotator systems consist of 1 unit motorized and 1 unit idler rotator assemblies. Motorized four wheel rotator assembly provides rotation without slippage.

Standard Features

- Synchronized operation with column-booms
- Durable external painting resistance against scratches and damages
- PU coated wheels

Optional Features

- Wireless remote control
- Motorized or manual carriage
- Structure with high base for special applications

MODEL	AS SA 5T	AS SA 10 T	AS SA 20 T	AS SA 40T
FEATURE				
Maximum Capacity	5000 Kg	10000 Kg	20000 Kg	40000 Kg
Minimum Rotating Diameter	Ø 300 mm	Ø 500 mm	Ø 500 mm	Ø 500 mm
Maximum Rotating Diameter	Ø 3500 mm	Ø 4000 mm	Ø 4000 mm	Ø 5000 mm
Length x Width x Height	1525 x 435 x 850 mm	2020x 900 x 950 mm	2250 x 980 x 1100 mm	2850 x 850 x 1250 mm
Wheel Diameter and Width	Ø 250 x 60	Ø 300 x 70 – 2 Adet	Ø 300 x 70 – 2 Adet	Ø 380 x 75 – 2 Adet
Engine Power	0.18 Kw – 2 Adet	0.25 Kw – 2 Adet	0.12 Kw – 2 Adet	0.18 Kw – 2 Adet

Self-Adjusting Rotators

